



379 PETERBILT HEADLAMP MOUNT FENDER SHIELDS

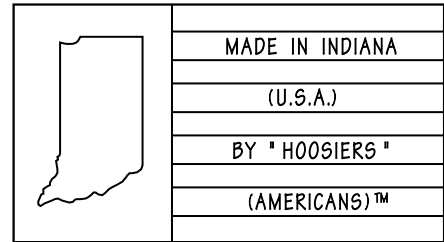

INSTRUCTIONS

1. BEFORE YOU BEGIN TO INSTALL THE FENDER SHIELDS, KEEP IN MIND THAT THE PROPER LOCATION OF THE FENDER SHIELDS IS MORE ABOUT PERSONAL PREFERENCE THAN AN EXACT SCIENCE.
2. PLACE THE FENDER SHIELD INTO "YOUR" PREFERRED LOCATION.
3. USE A FELT TIP MARKER AND MARK THE LOCATION OF THE HOLES TO BE DRILLED INTO THE STEP AND THE LIGHT SUPPORT BRACKET.
4. USE A CENTER PUNCH TO MARK THE CENTER LINE AND THEN DRILL THE 7/32" (.219 DIA.) HOLES. (THE USE OF A CENTER PUNCH WILL PREVENT THE DRILL FROM "WALKING" OFF THE SURFACES AND DAMAGING THE FENDER).
5. INSTALL THE SCREWS INTO THE STEP AND LIGHT SUPPORT BRACKET. WITH THE USE OF A SOCKET OR BOX END WRENCH, TIGHTEN ALL SCREWS.

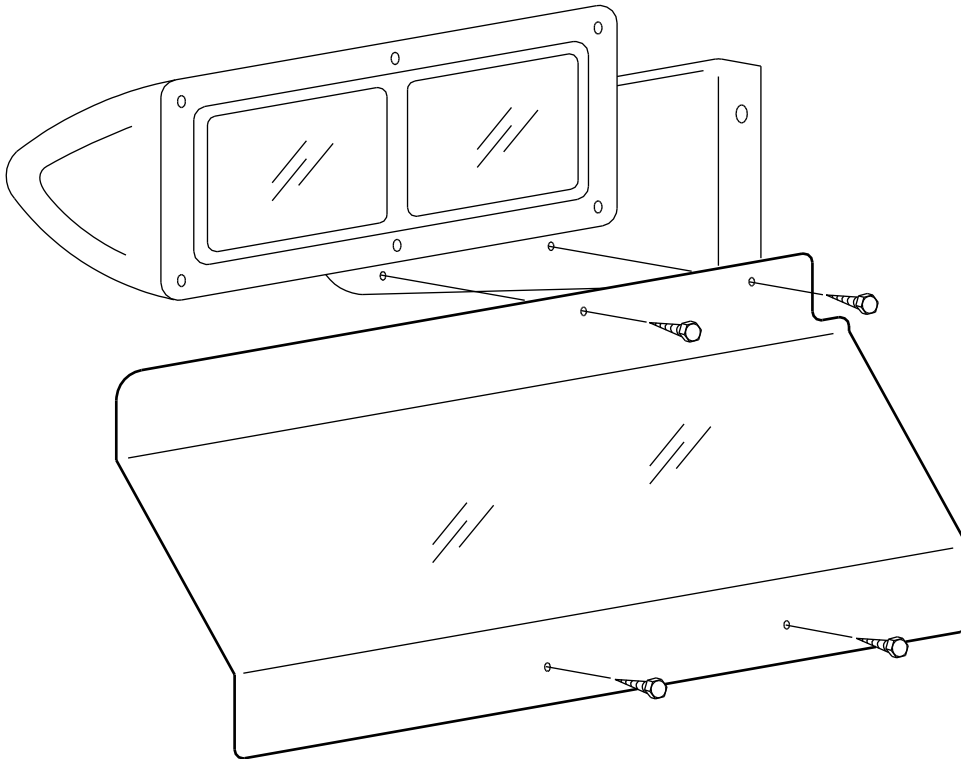

BY

